


---

# Deako Simple Timer Switch

Countdown timer switch for bathroom fans and household lights

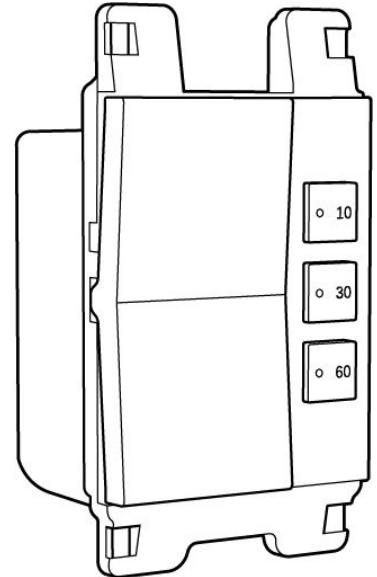

This timer switch is great for installing in the bathroom, garage, laundry room, and areas where occupancy is generally required for a shorter period of time. Once the time selected expires, lights automatically switch off, promoting energy efficiency. The switch utilizes 3 push buttons: 10-, 30-, and 60-minutes options, and one manual ON/OFF button. The switch also has a white LED indicator, reflecting the selected time and the ON/OFF status.

## Features

- Three pre-set options: 10 min, 30 min or 60 min; Simply push the button to set countdown time preference
- Automate the shut off operation of all types of lights including LEDs, CFLs, fans and heaters at a selected time
- Saves energy by automatically turning off a fan or light
- Continuous operation mode with manual off override

## Applications

The broad time delay range means this timer is suitable for a variety of applications, such as the bathroom exhaust fans, house fan, garage lights, closets, pantries and laundry rooms.

**Specifications**

<b>Compatibility</b>	Single pole circuits
	Deako Faceplate DS-FP series
	Deako Backplate DS-BP series
	Neutral wire required
<b>Regulatory approvals</b>	cULus Listed (Timers E482849)
<b>Supported currents &amp; load types</b>	INC/HAL 800W
	LED 120W
	¼ HP motor
<b>Environment</b>	Indoor use only
<b>Operating temperature range</b>	0°C to 40°C (32°F to 104°F)
<b>Dimensions (H x W x D)</b>	2.8" x 1.7" x 1.7"
<b>Weight</b>	2.6 oz
<b>Color</b>	White
<b>Warranty</b>	1-year
<b>Vertical markets</b>	Residential
	Multiple dwellings
	Hospitality / lodging

**Also Available in the Deako Switch Family**

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Simple Night Light
- Simple Astronomical Timer
- Smart Switch
- Smart Dimmer
- Smart Plug

Date	Notes
Job location	
Approved by	
Job no. / type	