

Deako Faceplates

For Deako Switches

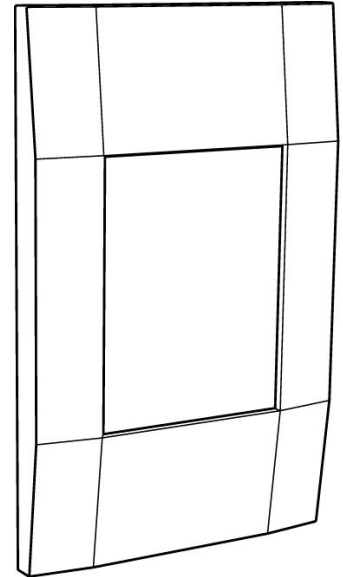

Deako screwless Faceplates are made with quality materials, beautiful design and durability in mind. They add contemporary styling to any residential commercial, institutional or industrial setting, Deako Faceplates look great anywhere. Available in various sizes for both single-gang and multi-gang applications.

Features

- Extremely durable faceplates are almost impossible to break
- Sleek, Sleek, modern design enhances any room
- Deako Faceplates snap onto any Deako Backplate, no screws required
- Fits standard junction box

Applications

- Available in various sizes for both single-gang and multi-gang applications

Specifications

For Deako Faceplates

Standard Deako Faceplates


	1-Gang Faceplate	2-Gang Faceplate	3-Gang Faceplate	4-Gang Faceplate
SKU	DS-FP1Y-WHWH-UCX	DS-FP2Y-WHWH-UCX	DS-FP3Y-WHWH-UCX	DS-FP4Y-WHWH-UCX
Dimensions (H x W x D)	4.75" x 3" x .39"	4.75" x 4.82" x .39"	4.75" x 6.64" x .39"	4.75" x 8.45" x .39"
Weight	0.56 oz	0.75 oz	1 oz	1.3 oz
Backplate compatibility / SKU	1-Gang Backplate	2-Gang Backplate	3-Gang Backplate	4-Gang Backplate
	<i>(Quick Wire)</i> DS-BP1Q-WHNL-UCX	<i>(Quick Wire)</i> DS-BP2Q-WHNL-UCX	<i>(Quick Wire)</i> DS-BP3Q-WHNL-UCX	<i>(Quick Wire)</i> DS-BP4Q-WHNL-UCX
	<i>(Universal)</i> DS-BS1U-WHNL-UCX	<i>(Universal)</i> DS-BS2U-WHNL-UCX	<i>(Universal)</i> DS-BS3U-WHNL-UCX	<i>(Universal)</i> DS-BS4U-WHNL-UCX
	<i>(Wired)</i> DS-BP1X-WHNL-UCX	<i>(Wired)</i> DS-BP2X-WHNL-UCX	<i>(Wired)</i> DS-BP3X-WHNL-UCX	<i>(Wired)</i> DS-BP4X-WHNL-UCX

Deako Faceplates with Outlet


	2-Gang Faceplate with Outlet	3-Gang Faceplate with Outlet
SKU	DS-FP2Y-WHWH-UCD	DS-FP3Y-WHWH-UCD
Dimensions (H x W x D)	4.75" x 4.82" x .39"	4.75" x 6.64" x .39"
Weight	1 oz	1.4 oz
Faceplate compatibility / SKU	2-Gang Backplate with Outlet	3-Gang Backplate with Outlet
	<i>(Wired, Outlet Left)</i> DS-BP2X-WHNL-UCL	<i>(Wired, Outlet Left)</i> DS-BP3X-WHNL-UCL
	<i>(Wired, Outlet Right)</i> DS-BP2X-WHNL-UCR	<i>(Wired, Outlet Right)</i> DS-BP3X-WHNL-UCR

Available configurations


For Deako Faceplates




1-Gang




2-Gang




3-Gang

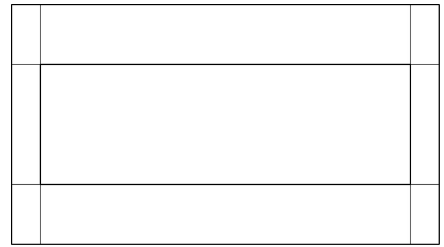

4-Gang




1-Gang with Outlet

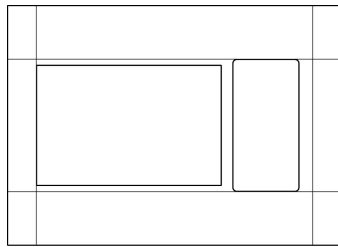

2-Gang with Outlet

Faceplates with outlet are reversible and can be used for outlets on the left and the right.

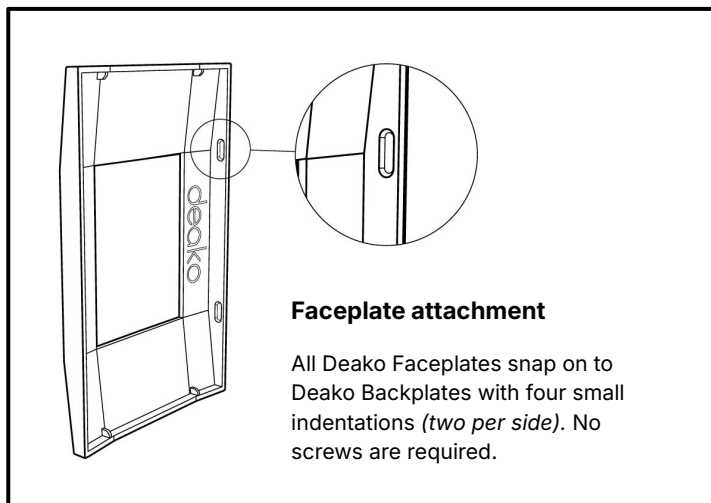

Faceplate attachment

All Deako Faceplates snap on to Deako Backplates with four small indentations (*two per side*). No screws are required.

Specifications cont.

For Deako Faceplates

Environment	Indoor use only
Operating temperature range	0°C to 40°C (32°F to 104°F)
Color	White
Warranty	1-year
Vertical Markets	Residential
	Multiple dwellings
	Hospitality / lodging

Date	Notes
Job location	
Approved by	
Job no. / type	