

Deako Simple TR 15A Outlet

Tamper resistant Outlet

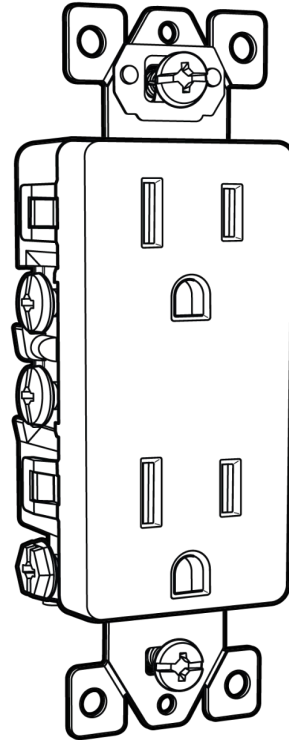

Decorator style wall outlet designed for residential use. Designed for quick push-in wire and side wire. Break-off ears for flush alignment. Break-off tabs allow easy two-circuit conversion. Tamper resistant grounded receptacle. TR symbol on residential receptacles assures they meet the 2008 NEC requirement

Features

- Grounding screw and self-grounding clip provide for automatic grounding in the junction box.
- Tamper-resistant - Safe for kids
- Wire Gauge #10-#14AWG Copper or copper-clad wire
- Quick push-in wire and side wire connections
- Washer-type break-off plaster ear for best flush alignment
- Designed and tested in accordance with UL498 requirements.

Applications

These outlets are suitable for installation in various locations in the home

Aesthetic compatibility - match your outlets with your Deako light switches

Specifications

Compatibility	2-Pole, 3-Wire
Compatible Outlet Covers	Recommended use with Deako Screwless Outlet Cover sold separately: 1-Gang Screwless Outlet Cover (DO-F1LD-STND-WHP) 2-Gang Screwless Outlet Cover (DO-F2LD-STND-WHP)
Termination	Push in & side wire
Regulatory approvals	UL 498
Supported currents & load types	125V 15A
	Wire Gauge #10-#14AWG copper or copper-clad wire
NEMA	5-15R
Environment	Indoor use only
Operating temperature range	-40°C to 75°C (-40°F to 167°F)
Dimensions (H x W x D)	103× 41× 20mm (4.05" x 1.6" x 0.7")
Weight	2.1 oz
Color	White
Warranty	1-year
Vertical markets	Residential
	Multiple dwellings
	Hospitality / lodging

Also Available in the Deako Outlet Family

- Simple TR 20A GFCI outlet
- USB Outlet Type A & C - 15A TR
- 1-Gang Screwless Outlet Cover
- 2-Gang Screwless Outlet Cover
- Smart Plug


Date	Notes
Job location	
Approved by	
Job no. / type	

Deako Simple USB Outlet Type A & C 15A TR

Tamper resistant Outlet with USB

Type A & Type C USB Ports
Total Load 5.4A 5V
Type C Port: 3.0A 5V
Type A Port: 2.4A 5V
USB Ports operate
independently of each other

Tamper-Resistance
Safe for children

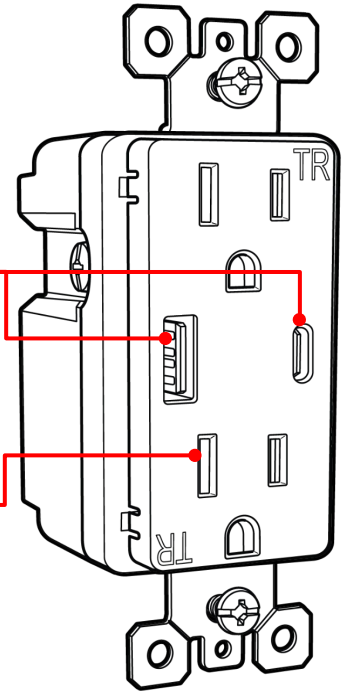

Charge your USB devices without the need for bulky AC adapters. Feature a smart chip that recognizes and optimizes the charging power of your electronic devices for fast and efficient charging of tablets, phones, e-readers etc. Compatible with all kinds of USB devices with multiple charging protocols.

Not for laptops. Faceplate not included

Features

- Universal compatibility - supports USB-A and USB-C charging ports
- High charging power - 2 high-speed USB ports for fast charging to the newest smartphones, tablets, e-readers, and more.
- Optimized charging - recognizes individual devices for efficient and effective charging
- Built-in protection - never worry about overloading your outlets
- Wire Gauge #12-#14AWG Copper or copper-clad wire
- Tamper-resistant - Safe for kids

Applications

Ideal for Bedrooms, Family Rooms, Home Offices
Aesthetic compatibility - match your outlets with your Deako light switches

Specifications

Compatibility	2-Pole, 3-Wire
	Recommended use with Deako Screwless Outlet Cover sold separately: 1-Gang Screwless Outlet Cover (DO-F1LD-STND-WHP) 2-Gang Screwless Outlet Cover (DO-F2LD-STND-WHP)
Regulatory approvals	cULus Approved
Supported currents & load types	125V 15A
	Wire Gauge #12-#14AWG copper or copper-clad wire
USB Output	Type A & Type C USB Ports Total Load 5.4A 5V Type C Port: 3.0A 5V Type A Port: 2.4A 5V USB Ports operate independently of each other
NEMA	5-15R
Environment	Indoor use only
Operating temperature range	-20°C to 75°C (-4°F to 104°F)
Dimensions (H x W x D)	106× 43× 38mm (4.17" x 1.7" x 1.5")
Weight	5.79 oz
Color	White
Warranty	1-year
Vertical markets	Residential
	Multiple dwellings
	Hospitality / lodging


Also Available in the Deako Outlet Family

- Simple TR 15A outlet
- GFCI Outlet 20A TR
- 1-Gang Screwless Outlet Cover
- 2-Gang Screwless Outlet Cover
- Smart Plug

Date	Notes
Job location	
Approved by	
Job no. / type	

Deako Simple TR 20A GFCI

Tamper resistant GFCI Outlet

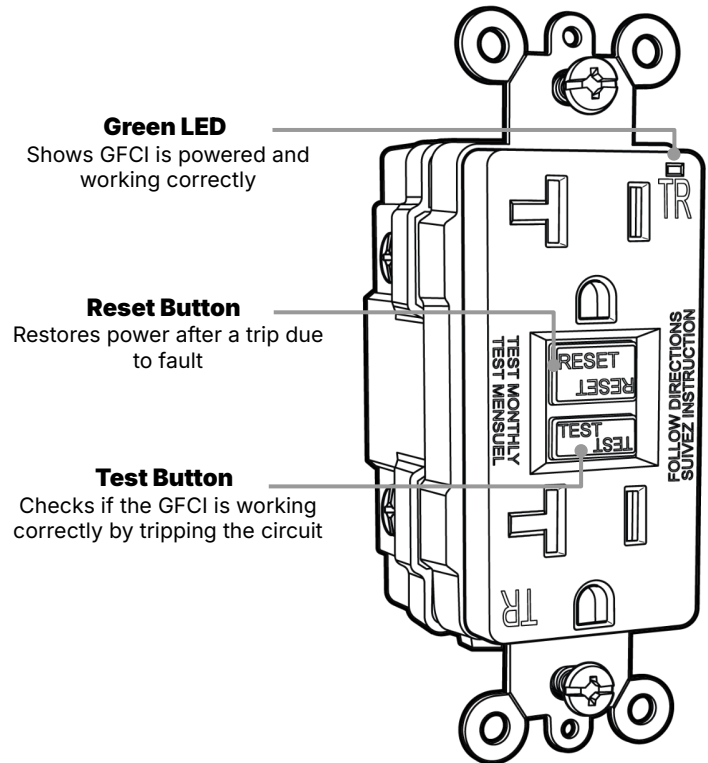

20 Amp 125 Volt Self-Test GFCI Outlet with always on protection. The GFCI unit automatically shuts off power when it detects a ground fault. The tamper-proof shutters prevent small children from inserting foreign objects. The automatic self-test ensures the unit is working properly, and a green LED light tells that the outlet is functional and safe.

Features

- Dual Protection System ensures an always on GFCI protection to ground faults
- Wire Gauge #12-#14AWG Copper or copper-clad wire
- Ultra-Compact Profile Back and side wire
- Automatically self-tests every 5 seconds
- Tamper-resistant - Safe for kids
- Green LED light tells that the outlet is functional and safe

Applications

Ideal for kitchens, bathrooms, garages, basements, laundry rooms, and other wet locations around the home

Aesthetic compatibility - match your outlets with your Deako light switches

Specifications

Compatibility	2-Pole, 3-Wire
	Recommended use with Deako Screwless Outlet Cover sold separately: 1-Gang Screwless Outlet Cover (DO-F1LD-STND-WHP) 2-Gang Screwless Outlet Cover (DO-F2LD-STND-WHP)
Regulatory approvals	cULus Approved
Supported currents & load types	125V 20A
	Wire Gauge #12-#14AWG copper or copper-clad wire
NEMA	5-20R
Environment	Indoor use only
Operating temperature range	-35°C to 66°C (-31°F to 150°F)
Dimensions (H x W x D)	103x 43x 38mm (4.05" x 1.7" x 1.5")
Weight	3.9 oz
Color	White
Warranty	1-year
Vertical markets	Residential
	Multiple dwellings
	Hospitality / lodging


Also Available in the Deako Outlet Family

- Simple TR 15A outlet
- USB Outlet Type A & C - 15A TR
- 1-Gang Screwless Outlet Cover
- 2-Gang Screwless Outlet Cover
- Smart Plug

Date	Notes
Job location	
Approved by	
Job no. / type	

Deako Screwless Outlet Covers

For Decorator Style Receptacles

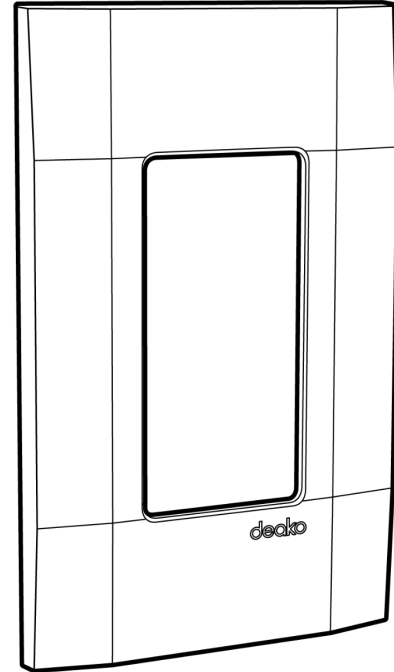

Designed to complement Deako switches, features a 1-Gang & 2-Gang screwless outlet cover that matches the clean lines of a Deako switch cover giving a sophisticated touch. Pair with either the Deako white outlet, USB or GFCI for a completed matching look.

Features

- Designed to match the Deako switch faceplate
- Sleek, Sleek, modern design enhances any room
- Deako Faceplates snap onto any Deako Backplate, no screws required
- Ensures proper plate positioning with subplate screws.
- Molded of highly durable polycarbonate
- High impact resistant

Applications

- Available in both single-gang and two-gang

Also available in the Deako Outlet Family

- 15A Deako white Outlet
- 20A Deako white GFCI
- 15A Dual USB outlet
- Smart Plug

Specifications


For Deako Faceplates

Standard Deako Faceplates



	1-Gang Screwless Outlet Cover	2-Gang Screwless Outlet Cover
SKU	DO-F1LD-STND-WHP	DO-F2LD-STND-WHP
Dimensions (H x W x D)	124mm/x 79.5mm/"x6.3mm (4.88" x 3.13 x 0.25")	124mm/x125.5mm/x6.3mm (4.88" x 4.95"x 0.25")
Weight	0.9oz	1.5oz
Mounting Type	Screwless	
Environment	Indoor use only	
Color	White	
Warranty	1-Year	
Regulatory Approvals	UL Listed	
Vertical Markets	Residential	
	Multiple dwellings	
	Hospitality / lodging	
Includes	Installation Instructions Screwless Outlet Cover Adaptor Plate & Screws	

Available configurations

1-Gang Screwless Cover

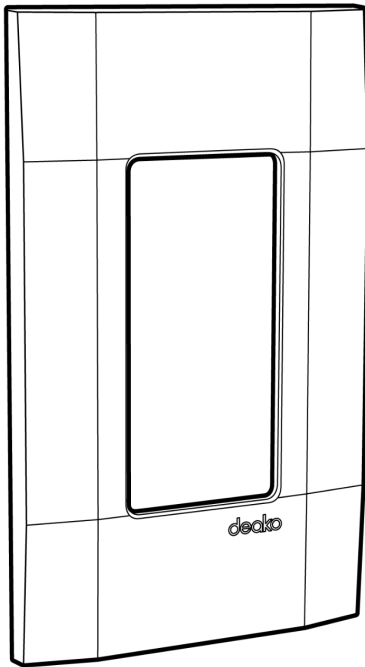

2-Gang Screwless Cover

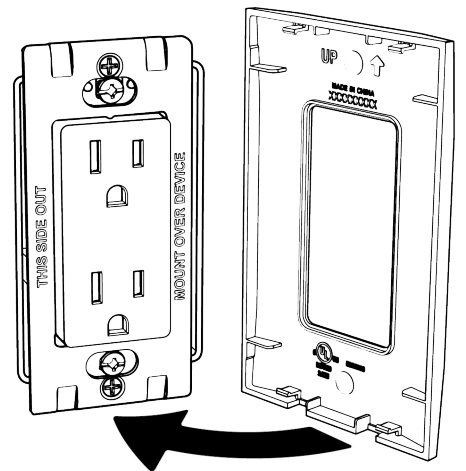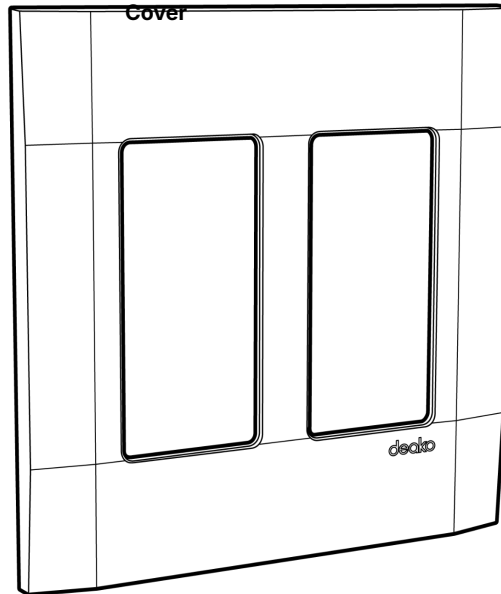

Date	Notes
Job location	
Approved by	
Job no. / type	