


# Deako Quick Wire Backplates (with Simple Rocker Switches)

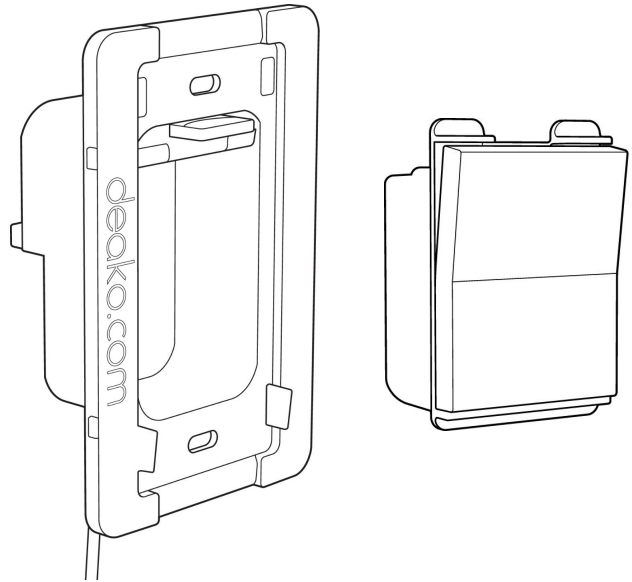

Deako Backplates for Deako Switches

Deako's backplate is specifically designed for all Deako switches and comes ready to install in your home. The backplate allows for switches to easily be clicked in and out, allowing for flexibility in Smart Switch, Simple Switch, and Smart Dimmer placement.

Installation is quick and easy with the use of push-in wire connectors on the rear of the backplate. Compatible with all NEC compliant light circuit wiring such as single-pole, 3-way, and 4-way configurations. Included in the backplates are simple single poles switches (unless otherwise stated)

## Features

- Works with any Deako switch - smart or simple
- Deako backplates are compatible with 14 AWG solid core wire for other wiring options - please contact your Deako account manager for more details
- Included mounting hardware

# Specifications


For Deako Quick Wire Backplates

	1-Gang Quick Wire Backplate W/ Simple Rocker Switch	2-Gang Quick Wire Backplate W/ Simple Rocker Switches	3-Gang Quick Wire Backplate W/ Simple Rocker Switches	4-Gang Quick Wire Backplate W/ Simple Rocker Switches
<b>SKU</b>	DS-BS1X-WHNL-UCQ	DS-BS2X-WHNL-UCQ	DS-BS3X-WHNL-UCQ	DS-BS4X-WHNL-UCQ
<b>Empty Backplates</b>	DS-BP1Q-WHNL-UCX	DS-BP2Q-WHNL-UCX	n/a	n/a
<b>Backplate Dimensions (H x W x D)</b>	4.45" x 2.93" x 1.73"	4.45" x 4.75" x 1.73"	4.45" x 6.57" x 1.73"	4.45" x 8.34" x 1.73"
<b>Backplate Weight</b>	2.3 oz	4.3 oz	6.2 oz	8.2 oz
<b>Min. j-box interior (W x D)*</b>	2.9" x 1.8"	4.7" x 1.7"	6.5" x 1.7"	8.3" x 1.7"
<b>Faceplate compatibility / SKU</b>	1-Gang Faceplate	2-Gang Faceplate	3-Gang Faceplate	4-Gang Faceplate
	DS-FP1Y-WHWH-UCX	DS-FP2Y-WHWH-UCX	DS-FP3Y-WHWH-UCX	DS-FP4Y-WHWH-UCX
<b>Compatibility</b>	Single pole, 3-way, 4-way and dead-end circuits			
	Deako Faceplate DS-FP series			
	Deako Switches DS-SS, DS-CS, & DS-CD series			
	All standard NEC compliant junction boxes ( <i>Deako recommends 2.5" depth for ease of installation</i> )			
<b>Regulatory Approvals</b>	cULus Listed (UL514D)			
<b>Power</b>	120V AC 15A			
<b>Environment</b>	Indoor use only			
<b>Operating temperature range</b>	0°C to 40°C (32°F to 104°F)			
<b>Warranty</b>	1-year			
<b>Vertical Markets</b>	Residential			
	Multiple dwellings			
	Hospitality / lodging			


# Available configurations

For Deako Quick Wire Backplates


1-Gang










2-Gang



3-Gang



4-Gang

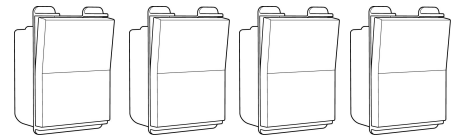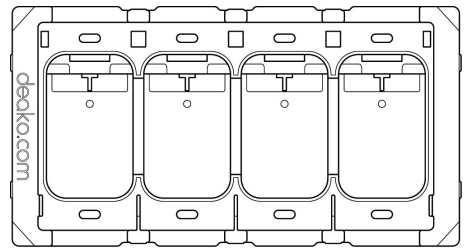

Date	Notes
Job location	
Approved by	
Job no. / type	