
# Deako Simple Ventilation Timer Switch

Countdown timer and hourly ventilation Timer Switch

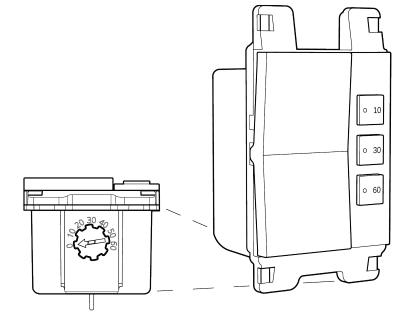

This Simple Ventilation Timer Switch is designed to monitor and control the operation of the bathroom exhaust fan and delivers a precise amount of fresh air ventilation throughout the day, automatically. Using the dial located on the side of the switch, the user can adjust the 'ventilation' setting. When used in conjunction with the countdown timer buttons, both timers ensure that the bathroom is properly ventilated at all times.

The 'ventilation' setting allows the user to specify how many minutes per hour they want the fan to run, while the 3 countdown timer buttons specify how many minutes the user wants the fan to run during normal use. Both of these settings help homeowners save energy and meet continuous ventilation codes, such as ASHRAE 62.2 and CalGreen Title 24.

### **Features**

- Adjustable Ventilation timer to ensure proper bathroom ventilation, expelling stale air to improve indoor air quality
- Three countdown timer options: 10 min, 30 min or 60 min; simply push the button to set countdown time preference
- Designed to meet ASHRAE 62.2, Energy Star and CalGreen Title 24 codes for continuous ventilation\*
- Manual On/Off fan control
- Saves energy, countdown timer automatically turns the fan off

### **Applications**

Bathroom Exhaust Fans



<sup>\*</sup> when used with ASHRAE 62.2 compliant fans

#### **Specifications**

| Compatibility                   | Single pole circuits         |
|---------------------------------|------------------------------|
|                                 | Deako Faceplate DS-FP series |
|                                 | Deako Backplate DS-BP series |
|                                 | Neutral wire required        |
| Regulatory approvals            | cULus Listed TIMERS E482849  |
| Supported currents & load types | INC/HAL 800W                 |
|                                 | LED 120W                     |
|                                 | ¼ HP motor                   |
| Environment                     | Indoor use only              |
| Operating temperature range     | 0°C to 40°C (32°F to 104°F)  |
| Dimensions (H x W x D)          | 2.8" x 1.7" x 1.7"           |
| Weight                          | 2.6 oz                       |
| Color                           | White                        |
| Warranty                        | 1-year                       |
| Vertical markets                | Residential                  |
|                                 | Multiple dwellings           |
|                                 | Hospitality / lodging        |

## Also Available in the Deako Switch Family

- Simple Ceiling Fan Controller
- Simple Motion Switch
- Simple Dimmer
- Simple Nightlight
- Simple Astronomical Timer
- Simple Timer Switch
- Smart Switch
- Smart Dimmer
- Smart Plug

| Date           | Notes |
|----------------|-------|
| Job location   |       |
| Approved by    |       |
| Job no. / type |       |

